

HOOPIK

3501 - STRING LIGHTS LI 200 CM – TYPE E & F

DESIGN BY J.MAZOYER-DO

DOMESTIC | PROFESSIONAL | INTENSIVE



Polycarbonate diffuser

ABS frame

Technology: integrated LED - Luminous flux: 960 lm

Switch type: touch-activated dimmer

Function of the switch: ON/OFF (short click, 1s), brightness variation

Lighting mood:

Position I warm white (3000°K) dimmer switch (10 to 100%)

Lighting mood via Bluetooth:

White light variable from 4000°K to 2700°K & dimmer switch (10% to 100%)

Type of power supply: mains - Plug type: Plug type E & F

0.24 A - 230 V - 25 W - Lighting cable: 6.20 metres (8 rings) + 6-metres main cable


IP54 (ingress protection) | IK 6 (impact resistance) | CE

Energy rating: F

Powered by Smart & Green

Compatible with:

FERMOB LIGHTING APPLICATION - FERMOB LIGHTING SMART SWITCH - LUDO



2.2 kg

350121 ● Acapulco Blue
350182 ● Cactus

3501B9 ● Black Cherry
350120 ● Red Ochre

3502 - STRING LIGHTS LI 200 CM – TYPE I

DESIGN BY J.MAZOYER-DO

DOMESTIC | PROFESSIONAL | INTENSIVE



Polycarbonate diffuser

ABS frame

Technology: integrated LED - Luminous flux: 960 lm

Switch type: touch-activated dimmer

Function of the switch: ON/OFF (short click, 1s), brightness variation

Lighting mood:

Position I warm white (3000°K) dimmer switch (10 to 100%)

Lighting mood via Bluetooth:

White light variable from 4000°K to 2700°K & dimmer switch (10% to 100%)

Type of power supply: mains - Plug type: Plug type I (Australia, New-Zealand, China)

Lighting cable: 6.20 metres (8 rings) + 6-metres main cable


0.24 A - 230 V - 25 W - IP54 (ingress protection) | IK 6 (impact resistance) | CE

Energy rating: F

Powered by Smart & Green

Compatible with:

FERMOB LIGHTING APPLICATION - FERMOB LIGHTING SMART SWITCH - LUDO



2.2 kg

350221 ● Acapulco Blue
350282 ● Cactus


350220 ● Red Ochre

HOOPIK

3503 - STRING LIGHTS LI 200 CM – TYPE J

DESIGN BY J.MAZOYER-DO

DOMESTIC | PROFESSIONAL | INTENSIVE



Polycarbonate diffuser

ABS frame

Technology: integrated LED - Luminous flux: 960 lm

Switch type: touch-activated dimmer

Function of the switch: ON/OFF (short click, 1s), brightness variation

Lighting mood:

Position 1 warm white (3000°K) dimmer switch (10 to 100%)

Lighting mood via Bluetooth:

White light variable from 4000°K to 2700°K & dimmer switch (10% to 100%)

Type of power supply: mains - Plug type : Plug type J (Switzerland, Liechtenstein)

0.24 A - 230 V - 25 W - Lighting cable: 6.20 metres (8 rings)

+ 6-metres main cable

IP54 (ingress protection) | IK 6 (impact resistance) | CE


Energy rating: F

Powered by Smart & Green

Compatible with:

FERMOB LIGHTING APPLICATION - FERMOB LIGHTING

SMART SWITCH - LUDO



2.2 kg

350321 ● Acapulco Blue
350320 ● Red Ochre

350382 ● Cactus
3503B9 ● Black Cherry

hoopik
LI200


MUCH MORE THAN A GARLAND...

HOOPIK LI200 is a fully fledged **aerial lighting solution.**

It consists of a 12-metre matt black cable, including a 6-metre hanging cable, plus 8 LED spotlights that are adjustable through 360° and 2 hook mechanisms, one at each end.

The dimmer switch, which is easy to access once installed, means it's equally suited to both a muted lounge area and a large, brightly lit table.

What's more, it's equipped with Bluetooth technology and can be controlled remotely with the Fermob Lighting app or the Ludo connected outdoor switch.

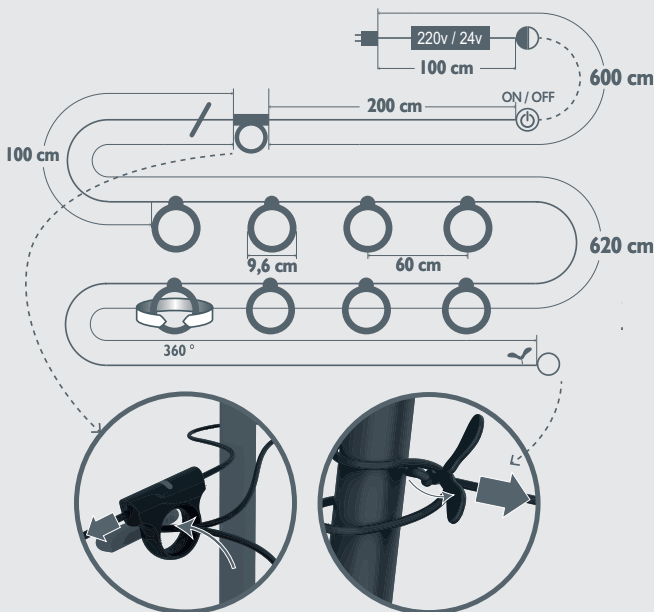

HOOPIK


3510 - LAMP Ø24 CM
DESIGN BY J.MAZOYER-DO

NEW


DOMESTIC | PROFESSIONAL | INTENSIVE

INDOOR

4



Polycarbonate diffuser
Aluminium frame
ABS Base
Technology: integrated LED - Luminous flux: 200 lm
Switch type: touch-activated dimmer
Function of the switch: change the brightness (10 to 100%, click 4 s),
change the light temperature (double short click),
ON/OFF (short click, 1s)
Lighting mood:
Position 1 warm white (2700°K) dimmer switch (10 to 100%)
Position 2 neutral white (4000°K) dimmer switch (10 to 100%)
Type of power supply: battery - Min. Battery life (100%): 8 h
Battery use cycle: 300 cycle
Recharge time: 5h - Type of recharge: USB Fermob magnet
1.5 m cable (provided)
Bypass to prevent battery damage during wired use
2 A - 5 V - 10 W - IP42 (Ingress protection) | IK 10 (Impact resistance) | CE | FCC | UKCA
Energy rating: F
Powered by Smart & Green



351021 Acapulco Blue
351020 Red Ochre

3510C7 Grey lapilli
351042 Liquorice

Watch our video



HOOPIK



